



# LED TECHNICKÉ SVIETIDLÁ

## LINX PROFI SQUARE



220-240V-50/60Hz



IP<sub>20</sub>



-20+40°C



65°





30 000

Pf (λ) >0,9



NEUTRAL WHITE

- VSTAVANÉ SVIETIDLO LED MCOB
- teleso svietidla: lakovaný hliník
- difúzor: polykarbonát (PC)
- vysoká svetelná účinnosť
- index podania farieb Ra/CRI ≥ 90
- činiteľ osvetlenia UGR<19
- flicker-free driver
- päťročná záruka

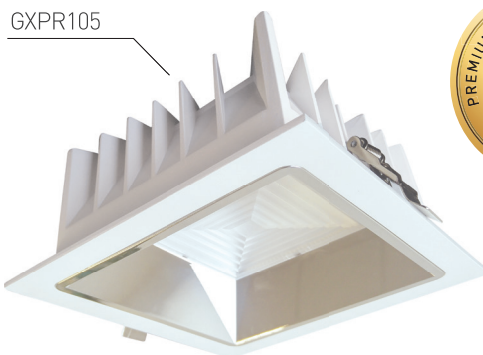
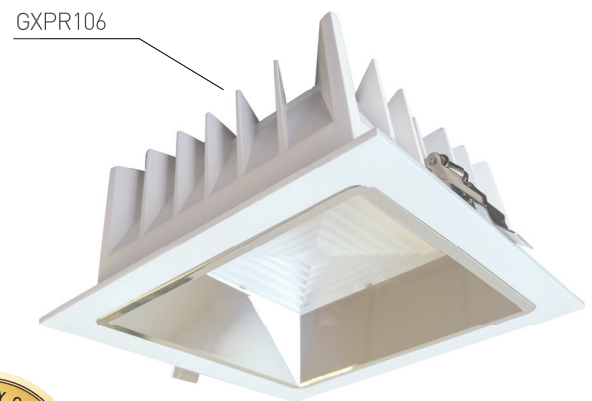
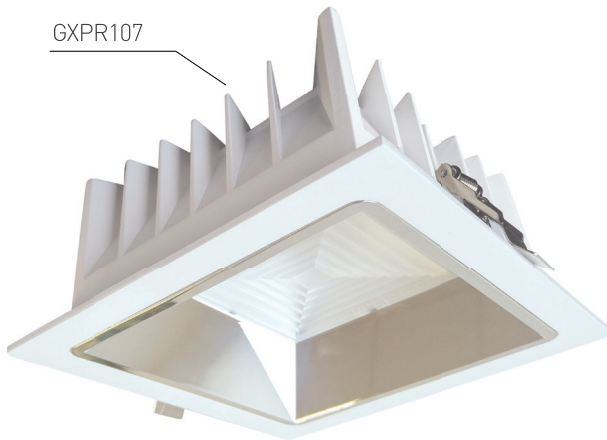
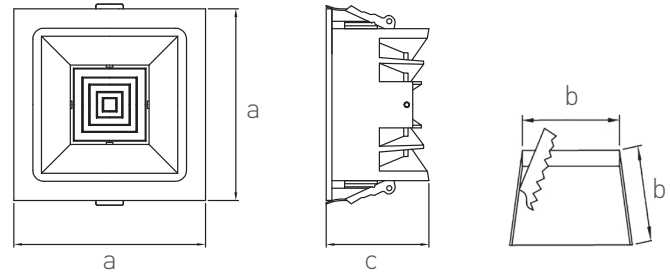


GXPR104  
LINX PROFI-S 10W NW

GXPR105  
LINX PROFI-S 20W NW

GXPR106  
LINX PROFI-S 30W NW

GXPR107  
LINX PROFI-S 40W NW

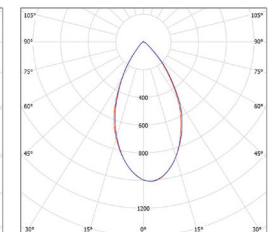

LED 10W ▶ ≥D 70W  
 LED 20W ▶ ≥D 140W  
 LED 30W ▶ ≥D 210W  
 LED 40W ▶ ≥D 280W

						$T_c$ CCT	$R_a$ CRI	$\leftarrow a \rightarrow$ [mm]	$\leftarrow b \rightarrow$ [mm]	$\leftarrow C \rightarrow$ [mm]		
LINX PROFI-S 10W NW	GXPR104	8592660122557	10	950	neutrálna biela	4000K	> 90	115	100	60	0,41	1/50
LINX PROFI-S 20W NW	GXPR105	8592660122564	20	1900	neutrálna biela	4000K	> 90	140	125	75	0,58	1/30
LINX PROFI-S 30W NW	GXPR106	8592660122571	30	2850	neutrálna biela	4000K	> 90	160	145	80	0,72	1/18
LINX PROFI-S 40W NW	GXPR107	8592660122632	40	3800	neutrálna biela	4000K	> 90	195	180	95	1,01	1/16